

## **VHF MARINE TRANSCEIVER**

With DSC modem and CH70 watch receiver

## Model FM-3000

- 25 Watts or 1 Watts RF Output Power
- Built-in DSC meets RTMC SC101 requirement
- Displays L/L and time with a GPS receiver connected
- Optional Controllable Mic allows full control from remote locations such as open deck or flybridge
- All U.S., international channels and NOAA weather channels available
- Waterproof speaker microphone provides clear reception and transmission
- Easy channel selection with large rotary control
- Triple watch on selected channel while monitoring channel 16 and 70
- Quick access to channel 16/9 Key
- Optional voice scrambler provides private communications with specific group.







The future today with FURUNO's electronics technology

**FURUNO ELECTRIC CO., LTD.** 9-52 Ashihara-cho, Nishinomiya City, Japan Phone: +81 (798) 65 2111 Fax: +81 (798) 65 4200, 66-4622 URL:www.furuno.co.jp Catalogue No. V-029a

The FURUNO FM-3000 is a high-performance, 25 W or 1 W marine VHF radiotelephone with DSC (Digital Selective Calling) facilities. The compact, stylish and waterproof unit is ideal for the panel or tabletop installation in the cockpit or on the open flybridge.


The FM-3000 employs a large channel selector and knobs for volume and squelch adjustments for ease of operation. The selected channel is displayed with large and bold number on a bright LCD. Connected with an appropriate GPS receiver, own ship's position and time (UTC and local) may be displayed. This feature ensures the transmission of your location in an emergency or when you are attempting to meet a fellow vessel.

The DSC uses a digital signal to send and receive specific information as MMSI (Maritime Mobile Service Identity), working frequencies, etc. so that a call is addressed to a designated user or group that has DSC facilities. In an emergency, you can transmit the distress alert by simply pressing the dedicated distress button. The distress alert is acknowledged by coastal stations or ships equipped with DSC capability.

All functions of the FM-3000 can be controlled from the optional FM-3010 controllable mic. This waterproof mic can be used as a second station to the FM-3000, allowing access while you are on the deck or flybridge.

## **SPECIFICATIONS OF FM-3000**

| General  |  |                            | DSC  | RTCM SC101 proposa;      |  |
|--|--|----------------------------|--|--------------------------|--|
| 1. Frequency Coverage                              |  |                            | Interface (NMEA0183 ver. 2.0/3.01)   |                          |  |
| Transmit   | 156.025 to   | 157.425 MHz                | Input  | RMC, GGA, GNS, GLL,      |  |
| Receive  | 156.050 to 163.275 MHz   |                            | Output   | DSC*, DSE*               |  |
| 2. Mode  | FM (16K0G3E)<br>DSC (16K0G2B)  |                            |  | *NMEA0183 ver. 3.01 only |  |
|  |  |                            |  |                          |  |
| 3. Channel Spacing                                 | 25 kHz<br>±10 ppm  |                            | ENVIRONMENT (IEC 60945 test method)  |                          |  |
| 4. Frequency Stability                             |  |                            | Temperature  | -15°C to +55°C           |  |
| Transmitter  |  |                            | Waterproofing  | IPX5 (IEC 60529),        |  |
| 1. Output Power                                    |  |                            |  | CFR-46 (USCG standard)   |  |
| 2. Modulation System                               | Variable reactance phase<br>modulation<br>±10 ppm<br>±5.0 kHz<br>-70 dBc |                            | POWER SUPPLY   |                          |  |
|  |  |                            | 12 VDC, 5.5 A max  |                          |  |
| 3. Frequency Stability                             |  |                            | EQUIPMENT LIST<br>Standard<br>1. Transceiver Unit with Speaker Microphone FM-3000 1 unit |                          |  |
| 4. Max. Frequency Deviation                        |  |                            |  |                          |  |
| 5. Spurious Emissions                              |  |                            |  |                          |  |
| Receiver   |  |                            | 2. Installation Materials and Spare Parts  |                          |  |
| 1. Receiver System                                 | Double cor   | nversion                   | Option   |                          |  |
|  | superheterodyne  |                            | 1. Controllable Mic FM-3010  |                          |  |
| 2. Sensitivity (12 dB SINAD)                       | 0.22 µV  |                            | 2. Extension Cable FM-3020   |                          |  |
| 3. Squelch Sensitivity                             | 0.22 µV  |                            | 3. Scrambler FM-3030   |                          |  |
| 4. Intermodulation Rejection Ratio More than 75 dB |  | 4. Flush Mount Kit FM-3040 |  |                          |  |
| 5. Spurious Response Rejection Ratio 75 dB         |  |                            |  |                          |  |
| 6. Adjacent Channel Selectivity 75 dB              |  |                            |  |                          |  |
| 7. Audio Output Power                              | 4.5 W (at 1  | 0% distortion)             |  |                          |  |
|  |  |                            |  |                          |  |

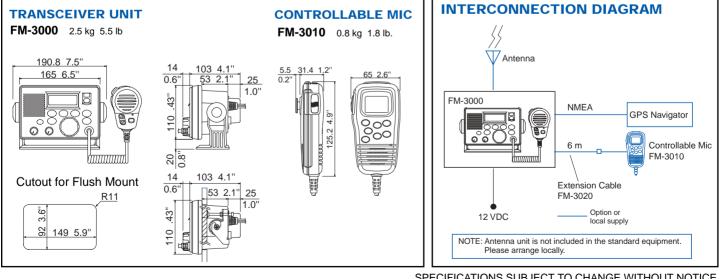

FURUNO U.S.A., INC. Camas, Washington, U.S.A. Phone: +1 360-834-9300 Telefax: +1 360-834-9400 FURUNO (UK) LIMITED Denmead, Hampshire, U.K. Phone: +44 2392-230303 Telefax: +44 2392-230101 FURUNO FRANCE S.A. Bordeaux-Mérignac, France Phone: +33 5 56 13 48 00 Telefax: +33 5 56 13 48 01 FURUNO ESPANA S.A. Madrid, Spain Phone: +34 91-725-90-88 Telefax: +34 91-725-98-97

FURUNO DANMARK AS Hvidovre, Denmark Phone: +45 36 77 45 00 Telefax: +45 36 77 45 01 **FURUNO NORGE A/S** Ålesund, Norway Phone: +47 70 102950 Telefax: +47 70 127021 FURUNO SVERIGE AB Västra Frölunda, Sweden Phone: +46 31-7098940 Telefax: +46 31-497093 FURUNO FINLAND OY Espoo, Finland Phone: +358 9 4355 670 Telefax: +358 9 4355 6710 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

03115SS Printed in Japan