

Optional Accessories

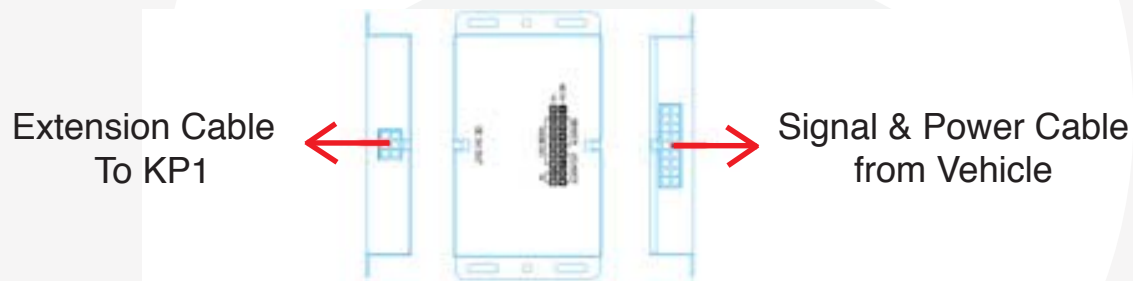
Junction Box: KP1-INT2














Extension Cable
To KP1

Junction Box

Signal &
Power Cable

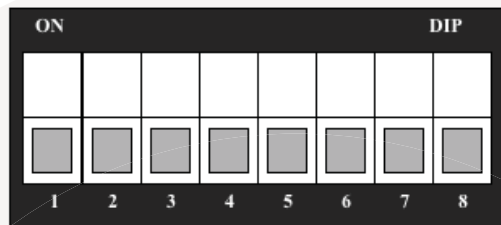


Cable Descriptions

	Battery -
	RPM
	Speed
	Reverse
	Brake
	Right
	Left
	Battery +
	Alarm Out 1A, 1B, 2A & 2B
	Alarm In 1, 2, 3 & 4
	ACC

Junction Box DIP Switch

1. Switch (On: Low, Off:High)



2. Delayed Shutdown Time Setting

DIP Switch No.			Time
1	2	3	
OFF	OFF	OFF	1 Min
ON	OFF	OFF	30 Min
OFF	ON	OFF	1 Hour
ON	ON	OFF	2 Hour
OFF	OFF	ON	4 Hour
ON	OFF	ON	15 Min
OFF	ON	ON	~
ON	ON	ON	0

3. Power On Delay Time Setting

DIP Switch No.		Time
4	5	
OFF	OFF	0 Sec
ON	OFF	5 Sec
OFF	ON	10 Sec
ON	ON	30 Sec

4. Not Used

DIP Switch No.		Description
6	7	
Not Used	Not Used	Not Used

5. 12v / 24v Setting

DIP Switch No.		Voltage
8		
OFF		12V
ON		24V

Input Voltage	DC 12V / 24V 2000mA		
Output Voltage	DC 5V 3000mA		
Operation Temp.	-20°C ~ +60°C		
When Used at 12V		When Used at 24V	
Initial Voltage	12.39V	Initial Voltage	23.3V
Power Cut Voltage	11.9V	Power Cut Voltage	22.7V