

Intellian® v130

Marine Stabilized Ku-band Communication Antenna System with 3-axis and 125cm Dish Diameter

Intellian® v130 is a 1.25m Ku-band maritime VSAT communication antenna system that supports SCPC, TDMA, Spread Spectrum or Carrier-in-Carrier and is suitable for high-speed internet, email, file transfer, video conference, VOIP, VPNs and database backup. With its 3-axis stabilized platform and advanced shock-resistant and vibration damping design, the v130 is capable of withstanding the most demanding sea conditions to provide “Always on” and “High-quality” broadband communications on all types of vessels.

The v130 offers superior RF performance with its simple yet sophisticated design that reduces installation time and total cost of ownership. Equipped with Remote IP access function, the v130 can be accessed, monitored and controlled from anywhere and anytime to ensure cost-effective technical supports without having an engineer come on board. The v130 is available in both cross-pol and co-pol feeds and supports multi-band LNB and the option of 2W-40W BUC.



Gyro-free Satellite Search Capability

Intellian's new generation Gyro-free satellite search function enables the v130 to acquire and lock onto the satellite without requiring a separate input from the ship's gyro-compass.

Superior RF Performance

Major RF components are designed and manufactured by Intellian's solid in-house engineering to achieve superior antenna gain and xpol isolation recognized among the best performances in the industry.

Wide Elevation Range

The wide elevation range from -20° to 120° enables the v130 to have seamless signal reception while the vessel is traveling near the Equator or Polar Regions.

Remote Management Solution

The v130 can be accessed, monitored, and controlled from any location in the world. Furthermore, hundreds of routine maintenance activities can be automated. These solutions include operating firmware upgrades, tracking parameters resets and system diagnosis.

Save Installation and Maintenance Time

Simple design allows users to install and setup the system without the need for a skilled engineer. The v130 provides the utmost in reliability resulting in time and cost savings in maintenance.

Open Platform Compatibility

The v130 is fully integrated with ABS (Automatic Beam Switching) function with leading service providers who use the embedded OpenAMIP protocol of the iDirect platform and v130 is also compatible with various platforms such as Hughes, Comtech, SatLink and more.

Intellian® v130

125cm Ku-band 3-axis Marine Satellite Antenna Systems

Technical Specification


Product Model	Specifications
Intellian v130	3-axis Marine Stabilized Ku-band Communication Antenna System
Radome & Antenna	
Radome (D x H)	165.2 x 168.9 cm / 65" x 66.5"
Dish Diameter	125.0 cm / 49.2"
Weight	149.7 kg / 337 lbs (variable w/ RF components)
Stabilized Pedestal Assembly	
Pedestal Type	3-axis / Azimuth, Elevation, Cross-level
Azimuth Range	Unlimited
Elevation Range	-20° to +120°
Cross-level Range	Up to ±37°
Stabilization Accuracy	0.2° peak mis-pointing @ max ship motion condition
Max Ship's Motion	
Roll / Pitch / Yaw	±25° roll, ±15° pitch, ±8° yaw @ 6 sec period
Turning Rate	Up to 12°/sec & 5°/sec²
Reflector & Feed Assembly	
TX Frequency	13.75 ~ 14.5 GHz Ku-band
TX Gain	43.2 dB @ Mid band
RX Frequency	10.95 ~ 12.75 GHz Ku-band
RX Gain	42.1 dB @ Mid band
Polarized Feed	Cross-pol only, Cross-pol and Co-pol
LNB Pol Control	Automatic LNB-pol angle control

Rack Mount Antenna Control Unit	
Display	2 line 40 character graphic VFD module
Key	20 push keys
Serial Interface	RS-232C (19200 bps 8, N, 1)
Modem Interface	Ethernet port / RS-232C / I/O ports
Remote Access	TCP/IP
Input Power	100~240 V AC, 50~60 Hz (max 350 W including 8 W BUC power)
Gyrocompass Interface	NMEA / Synchro
GPS	NMEA in / NMEA out


Key Features

Gyro-free Operation	Without requiring heading device input Quick setup to reduce installation time
Remote Access	Built-in web interface, Remote firmware upgrade
Customized Satellite Library	Additional satellite information setting not required for installation
Automatic Diagnosis	Encoder, Motor, Tilt/Gyro sensor, LNB pol control, LNB, Antenna & ACU power, Modem connection, I/F
DC Power Separation	Rotary joint - TX and RX IF signal Slip ring - Antenna power and 8W BUC power

System Diagram

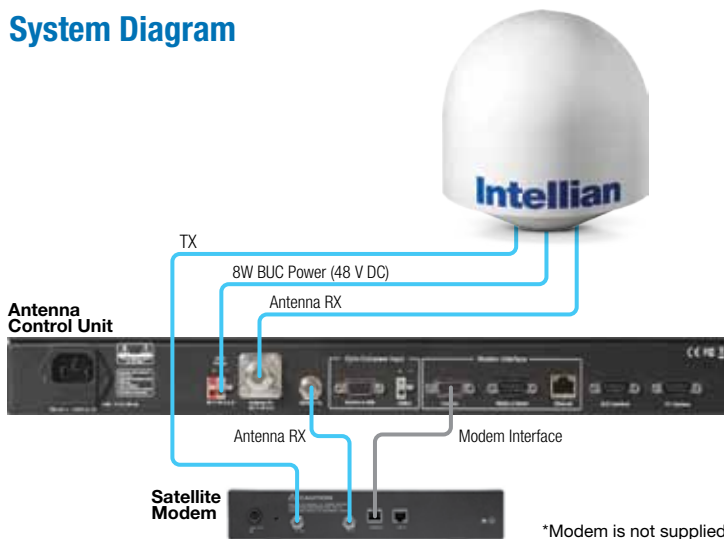

Antenna Dimensions

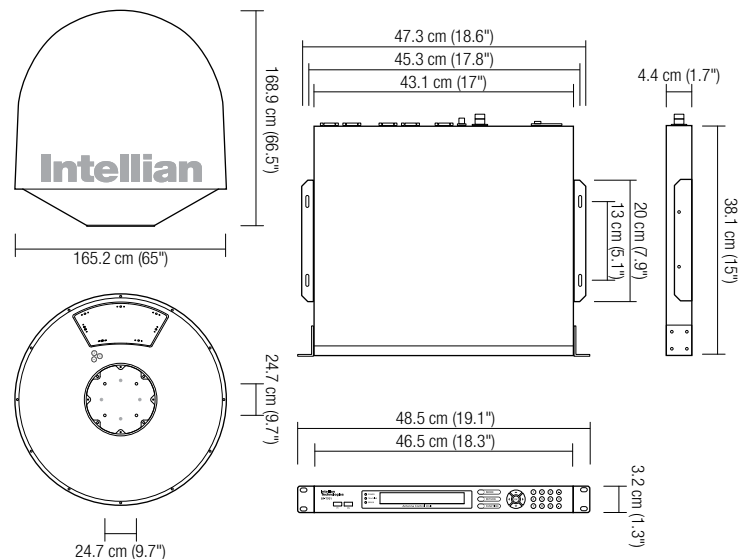

Intellian®

ISO 9001 Certified
For more info, visit intelliantech.com

Americas
Intellian Technologies USA, Inc.
9004 Research Drive
Irvine, CA 92618, USA
Tel +1-949-727-4498
Toll Free +1-888-201-9223
Fax +1-949-271-4183
Email info@intelliantech.com

Europe
Intellian B.V.
Bristolstraat 1, 3047AB
Rotterdam, Netherlands
Tel +31-1-0820-8655
Fax +31-1-0820-8656
Email info@intelliantech.com

MEA & APAC
Intellian Technologies, Inc.
2F Dongik Bldg., 98 Nonhyun-dong,
Kangnam-gu, Seoul 135-010, Korea
Tel +82-2-511-2244
Fax +82-2-511-2235
Email info@intelliantech.com