

Mobile Video Surveillance Cameras

Product Features

- High resolution color
- Fully integrated with audio
- IR illuminators with backlight compensation
- Small footprint
- Adjustable viewing angle
- Few or no exposed cables
- Tamper proof



Wedge Camera

- High resolution color series - 650 TVL
- Day/night viewing
- Microphone allows for separating out audio in various areas of the vehicle
- Intelligent IR technology for eliminating IR hot spots

Lens Sizes Part #	2.8mm / 4.0mm / 6.0mm / 8.0mm 710360 / 710361 / 710362 / 710363
Cable Lengths	6ft, 15ft, 25ft, 40ft, 50ft, 60ft
CCD	1/3" Sony Exview HAD II
Minimum Illumination	0 Lux with IR LEDs
Operating Temp	-5°F to +120°F (-20°C to +50°C)
NEMA Rating	Type 2
Input Voltage	12 volts DC
Power Consumption	240 MA or less



Camera shown with optional IR Illuminator (Part # 710369)



Dome Camera

- High resolution color series - 650 TVL
- Microphone allows for separating out audio in various areas of the vehicle
- Optional illuminator available

Lens Sizes Part #	2.8mm / 4.0mm / 6.0mm / 8.0mm 710370 / 710371 / 710372 / 710373
Cable Lengths	6ft, 15ft, 25ft, 40ft, 50ft, 60ft
CCD	1/3" Sony Exview HAD II
Minimum Illumination	0 Lux with optional IR illuminator
Operating Temp	-5°F to +120°F (-20°C to +50°C)
NEMA Rating	Type 2
Input Voltage	12 volts DC
Power Consumption	200 MA or less



Minibox Camera

- High resolution color series - 650 TVL
- Day/night viewing
- Microphone allows for separating out audio in various areas of the vehicle
- Intelligent IR technology for eliminating IR hot spots
- Adjustable viewing angle

Lens Sizes Part #	2.8mm / 4.0mm / 6.0mm / 8.0mm 710350 / 710351 / 710352 / 710353
Cable Lengths	6ft, 15ft, 25ft, 40ft, 50ft, 60ft
CCD	1/3" Sony Exview HAD II
Minimum Illumination	0 Lux with IR LEDs
Operating Temp	-5°F to +120°F (-20°C to +50°C)
NEMA Rating	Type 2
Input Voltage	12 volts DC
Power Consumption	240 MA or less

Mobile Video Surveillance Cameras



Right Front/Left Rear Mount



Left Front/Right Rear Mount

Exterior Side Mount Camera

- High resolution color series
- Day/night viewing
- Built-in heater



Lens Sizes Part #	Right Front/Left Rear 4.0mm / 6.0mm / 8.0mm / 12.0mm / 16.0mm 710380 / 710381 / 710382 / 710383 / 710384
Lens Sizes Part #	Left Front/Right Rear 4.0mm / 6.0mm / 8.0mm / 12.0mm / 16.0mm 710390 / 710391 / 710392 / 710393 / 710394
Cable Lengths	6ft, 15ft, 25ft, 40ft, 50ft, 60ft
CCD	1/3" Sony Super - HAD
Minimum Illumination	0 Lux with IR LEDs
Operating Temp	-40°F to +160°F (-40°C to +70°C)
IP Rating	IP 68
Input Voltage	12 volts DC
Power Consumption	450 MA or less




Stop-Arm Camera

- Utilizes **A.R.M.O.R.-StopArm** software
- Vehicle headlight compensation
- Ultra clear image
- High resolution color series - 650 TVL
- Day/night viewing reduces image "noise" in low light situations
- Built-in heater
- Wide viewing range



Lens Size Part #	Right Front/Left Rear 16.0mm 710385	Left Front/Right Rear 16.0mm 710395	Rear/Side Door 2.8mm 710441
Cable Lengths	6ft, 15ft, 25ft, 40ft, 50ft, 60ft		
CCD	1/3" Sony Exview HAD II		
Minimum Illumination	0 Lux with IR LEDs		
Operating Temp	-40°F to +160°F (-40°C to +70°C)		
IP Rating	IP 68		
Input Voltage	12 volts DC		

Camera Mounting Options

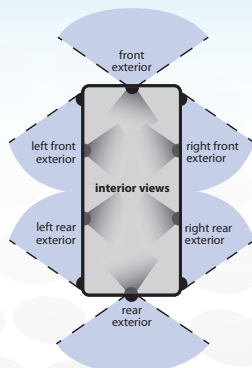

Interior Camera Views



Exterior Camera Views

