

Monitor system use in truck, bus, express car, special vehicle

To ensure safety, the driver should not watch the video footage or operate the monitor while driving. If there are any product problems, please contact Smart Witness: support.smartwitness.com

Warning: Please obey the local laws to install the product in the right position.

Attention: When the weather is cold, the LCD may be dark at first with the power on. After the temperature has increased, the LCD should function as normal.

7" QUAD DISPLAY MONITOR



SV7QLCD
User Manual

Before operating the monitor, please read this manual thoroughly and retain it for future reference.

Quad Monitor

7" Quad Monitor with Touch Button

1. Sunshade

2. Screw with rubber head

3. Bracket

4. LCD Screen

5. Light Sensor Window

6. Speaker

7. Menu Key
8. Input Video 1

9. Input Video 2


10. Power on/off

11. Input Video 3

12. Input Video 4

13. Video Mode Switching

14. R/C Window

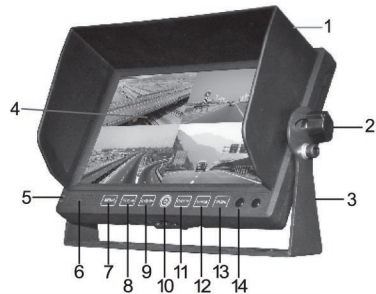

Specifications

Aspect Ratio	16:9		
Video Inputs	2 way		
Lumination	350 cd/m ²	250 cd/m ²	
Resolution	800*R.G.B		1024*R.G.B*600
Audio & Video	4 way video input, 1 way audio input, 4 way trigger		
System	PAL & NTSC automatically		
Voltage	12V~24V		
Language	Multi-language		
OSD Menu	Display Menu, Brightness, Colour, Contrast Adjustable		
Built-in Speaker	Yes		
Bracket Accessories	U type bracket		
Sunshade	Removeable		
Mode	Full / 2 / 3 / 4 image adjustable		
Set up	Mirror for individual image. A reserve delay can be set.		

Remote

1. Mode

2. Power

3. Up

4. Menu

5. Left


6. Right
7. Down

8. CH 1


9. CH 2

10. CH 3

11. CH 4



Cable Diagram (RCA)

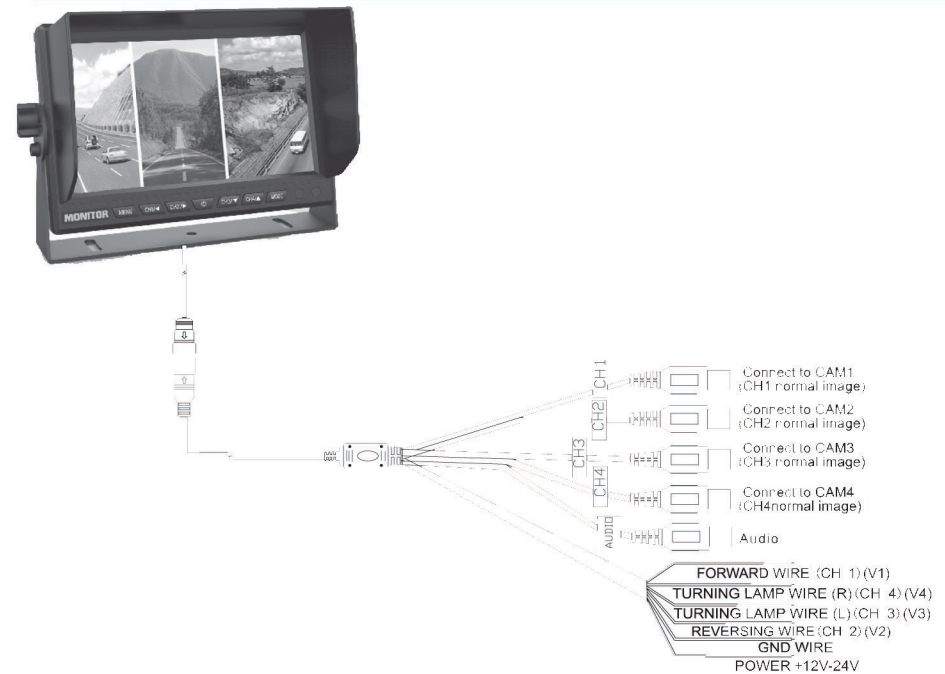


Package Contents




- 1) 7" LCD Monitor
- 2) Adjustable U Bracket
- 3) Power Adaptor & Triggers
- 4) Sun Shield
- 5) Remote Controller
- 6) Allen Key
- 7) User Guide

Monitor installation


1. Put U type bracket in the desired position and prepare the screws.
(See Below)

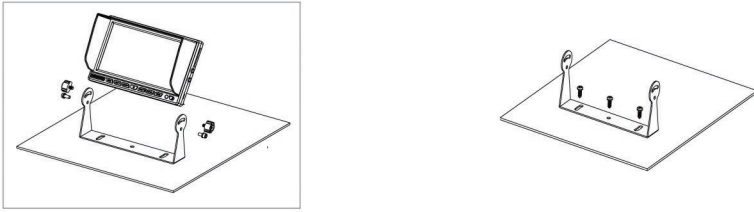

2. To lock the bracket with screws, place the monitor in the bracket and adjust to the desired angle. Then, screw the monitor into place.
(See Below)

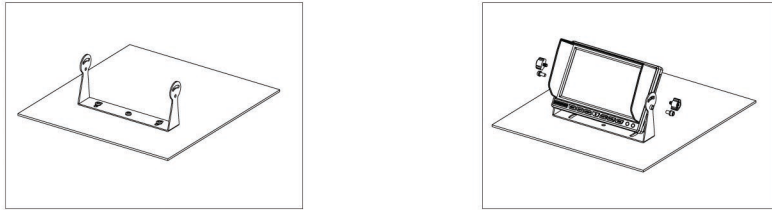


3. Once installed, the monitor can be adjusted forward 30° and backward 30°. (See Below)

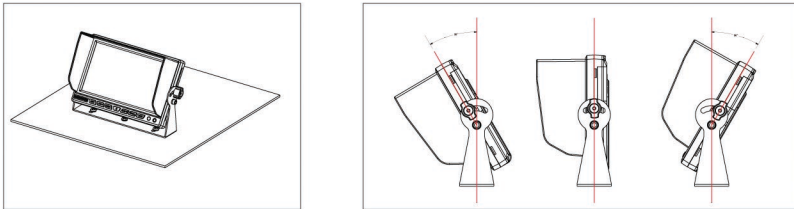


Monitor installation (Optional)


1. Firstly, fix the screws and the fan shaped bracket. (See Below)

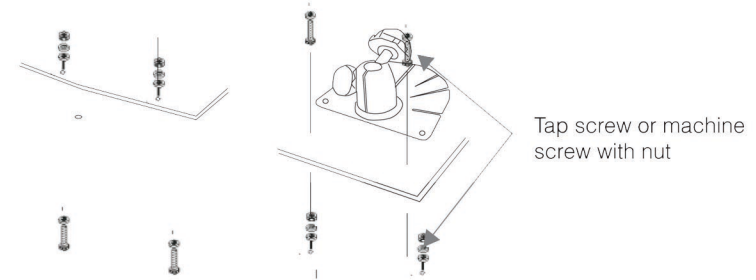

2. Secondly, put the metal buckle piece on the top of the fan-shaped bracket into the notch at the back of the monitor.
(See below)
3. Move the bracket to the proper location. (See Below)

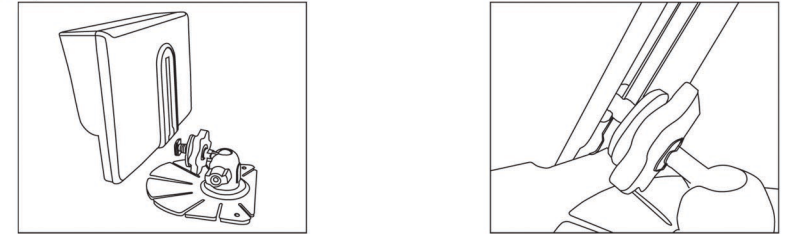

4. Fix the big screws of the bracket until tight, to keep monitor in place.
(See below pictures)

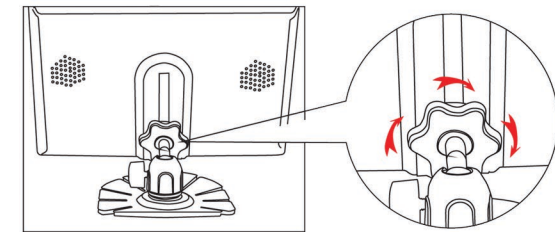

5. If users want to change the direction or angle of the monitor, firstly loosen the screws on the bottom of the bracket. Then, move the monitor to the desired location and fix the screws to the bottom again. (See below)

