

High-performance 30 Watts output power with an intercom function

LOUD HAILER

Model LH-3000



- Hail, Intercom, Alarm functions available
- Built-in high quality speaker
- 30 Watts of output power
- Eight automatic warning signals
- Up to four intercoms are connectable for two-way communication between master and specific remote or all remote stations
- Auxiliary audio input





FURUNO's LH-3000 is a high-performance 30 watts loud hailer with an intercom function. The LH-3000 is designed for a wide variety of ships. requiring high quality onboard and ship-to-ship communications under almost any circumstance. Solidly built and waterproof, the LH-3000 contains a

high quality built-in speaker and a microphone. On its front panel, there are easy-to-see states indicators.

By generating voice or eight internationally acknowledged warning signals from the horns, the LH-3000 notifies nearby vessels of your presence and status regardless of visibility conditions.

The LH-3000 can also function as an intercom, when connected to optional intercom speakers. Up to four intercoms can be connected for two-way communication between the bridge and one or all intercom stations.

The LH-3000 can be connected to various equipment to enable useful functions. When connected to an external alarm unit, the LH-3000 can function as a security alarm. Furthermore, an auxiliary audio input allows transmission of music or other external audio signals (from CD player, radio and etc.) to the intercom speakers and external horns.

SPECIFICATIONS OF LH-3000

Output Power

Hailer: 30 W Intercom: 4.5 W External Speaker: 4.5 W Internal Speaker: 2.5 W

Input

Microphone Impedance: 600 Ω Auxiliary Impedance: $10 k\Omega$

-73 dB ± 3 dB (0dB=1V/uBar) Microphone Sensitivity:

Auxiliary Sensitivity: 0 dB ±3 dB (1 kHz)

Frequency Response

Hail Mode: 100 Hz - 8 kHz at 3 dB Intercom Mode: 100 Hz - 8 kHz at 3 dB AUX Mode: 100 Hz - 8 kHz at 3 dB

Horn Frequency 520 Hz ±50 Hz

Distortion Factor

Hail Mode: 10% (1 kHz 30 W) Intercom Mode: 10% (1 kHz 4.5 W)

Signal to Noise


60 dB (1 kHz) Hail Mode: Intercom Mode: 60 dB (1 kHz) AUX Mode: 60 dB (1 kHz)

Output Impedance

Hail Speaker: 8 O Intercom Speaker: 4Ω External Speaker: 4 O

POWER SUPPLY

12 VDC, 5 A, 280 mA (Standby)

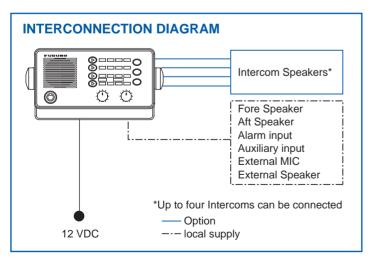

ENVIRONMENTAL

Temperature: -15 °C to + 55 °C (IEC 60945) IPX5 (IEC 60529). Waterproofing (Face of panel):

CFR 46 (USCG)


EQUIPMENT LIST

Standard

1. Loud Hailer LH-3000 1 unit 2. Microphone DM-2003 1 unit 3. Installation Materials and Spare Parts 1 set

Option

1. Intercom Speaker LH-3010 2. Flush Mount Kit LH-3020

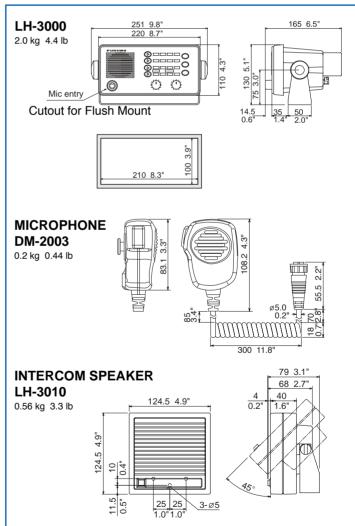

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO U.S.A., INC

Camas, Washington, U.S.A. Phone: +1 360-834-9300 Telefax: +1 360-834-9400 FURUNO (UK) LIMITED
Denmead, Hampshire, U.K.
Phone: +44 2392-230303 Telefax: +44 2392-230101

FURUNO FRANCE S.A.

Madrid, Spain Phone: +34 91-725-90-88 Telefax: +34 91-725-98-97

Bordeaux-Mérignac, France Phone: +33 5 56 13 48 00 Telefax: +33 5 56 13 48 01 **FURUNO ESPANA S.A.**

FURUNO DANMARK AS

Hvidovre, Denmark Phone: +45 36 77 45 00 Telefax: +45 36 77 45 01 **FURUNO NORGE A/S**

Ålesund, Norway Phone: +47 70 102950 Telefax: +47 70 127021 **FURUNO SVERIGE AB**

Västra Frölunda, Sweden Phone: +46 31-7098940 Telefax: +46 31-497093

FURUNO FINLAND OY Espoo, Finland Phone: +358 9 4355 670 Telefax: +358 9 4355 6710

04022Y Printed in Japan