DS-50T

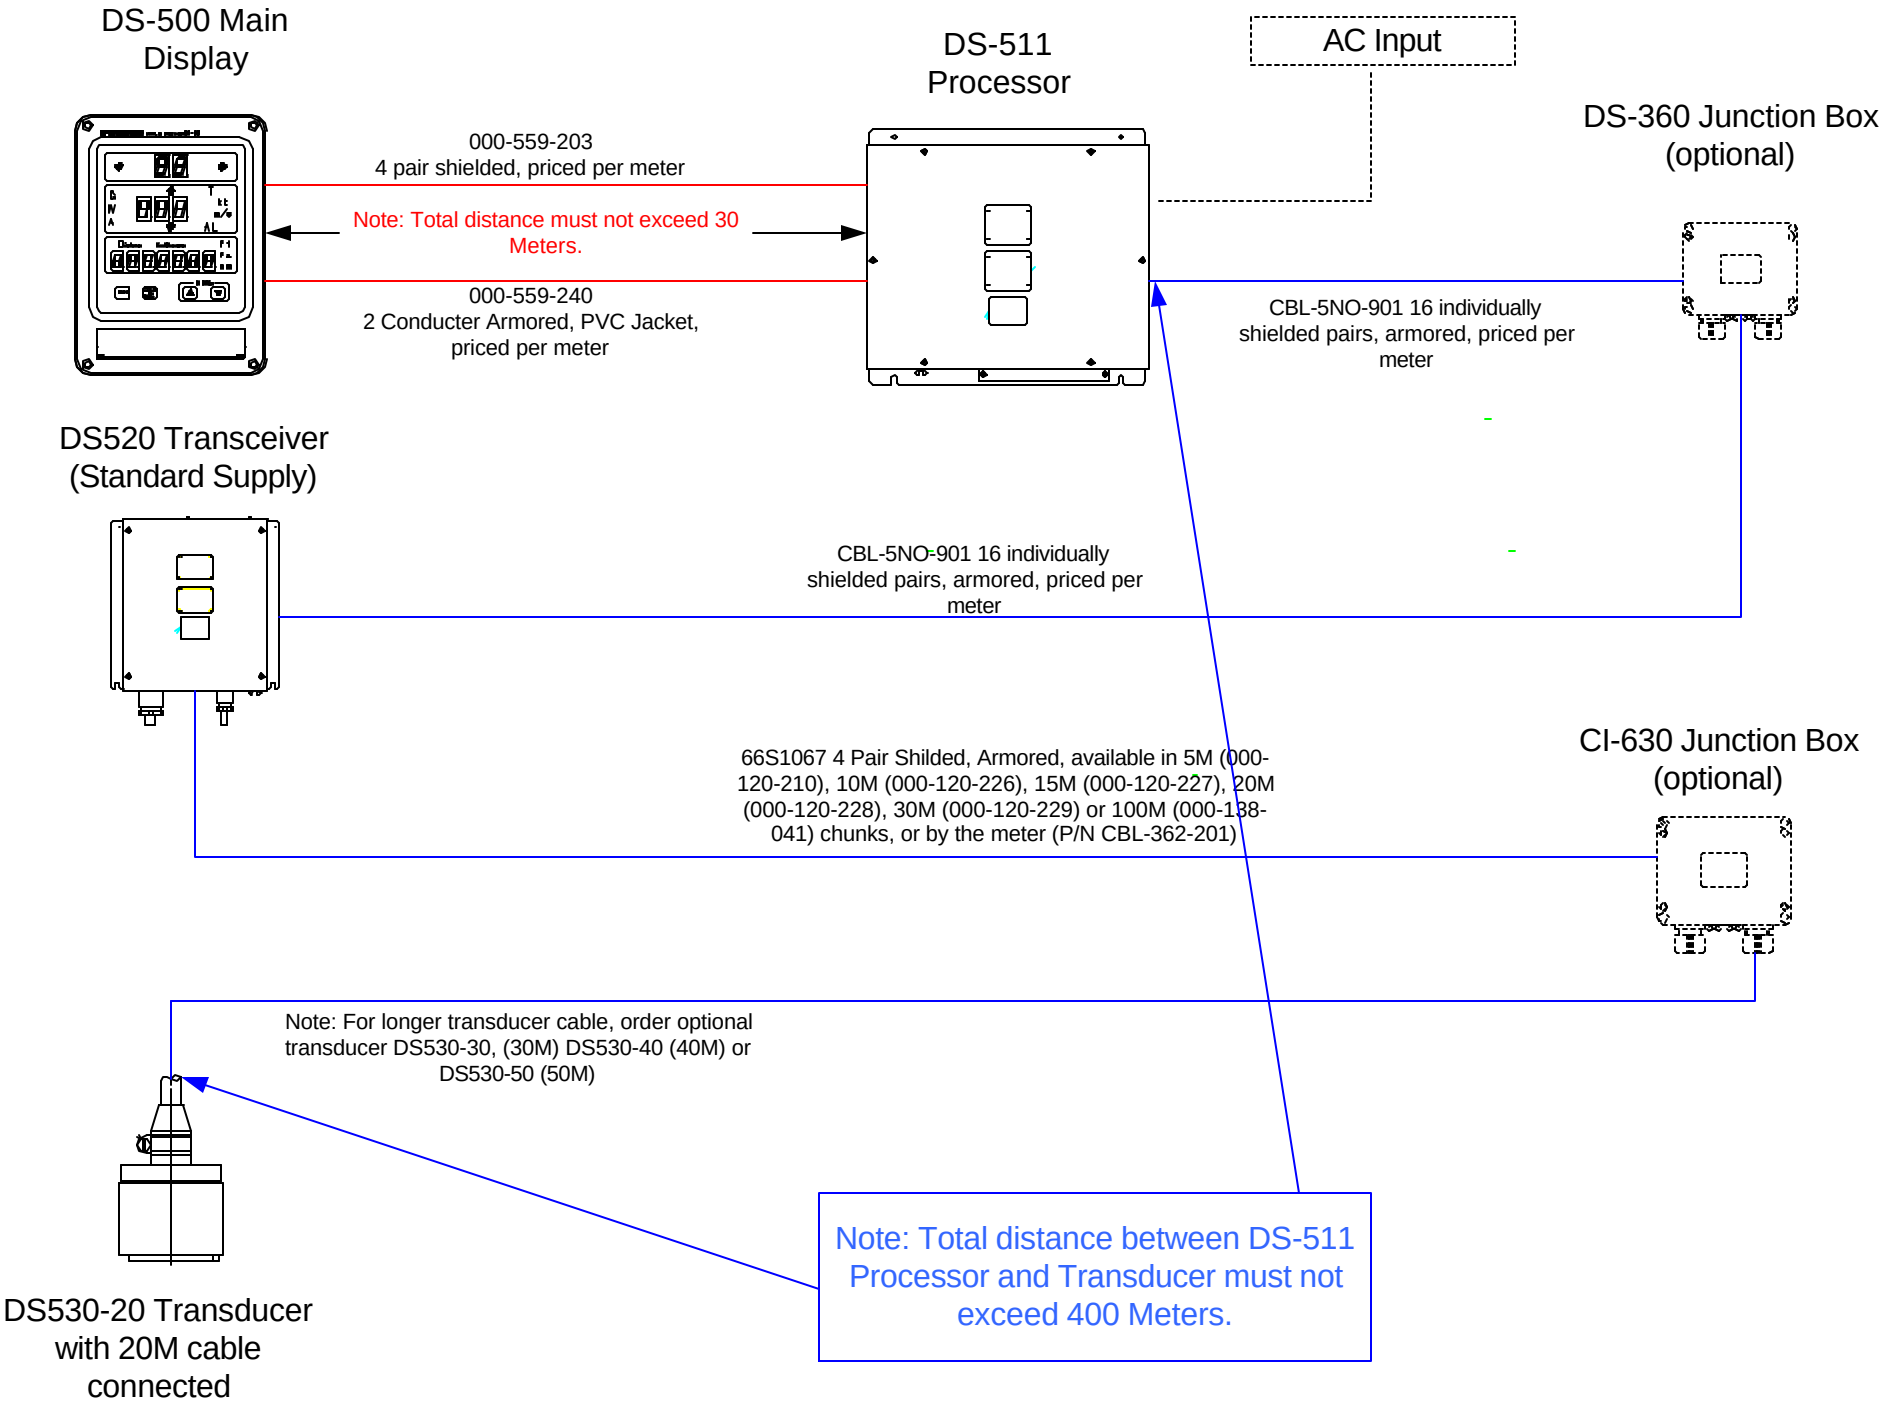
DS-500 Main Display
DS-511 Processor
AC Input
DS-360 Junction Box (optional)
000-559-203
4 pair shielded, priced per meter
Note: Total distance must not exceed 30 Meters.
000-559-240
2 Conducter Armored, PVC Jacket, priced per meter
CBL-5NO-901 16 individually shielded pairs, armored, priced per meter
DS520 Transceiver (Standard Supply)
CBL-5NO-901 16 individually shielded pairs, armored, priced per meter
66S1067 4 Pair Shilded, Armored, available in 5M (000-120-210), 10M (000-120-226), 15M (000-120-227), 20M (000-120-228), 30M (000-120-229) or 100M (000-138-041) chunks, or by the meter (P/N CBL-362-201)
CI-630 Junction Box (optional)
Note: For longer transducer cable, order optional transducer DS530-30, (30M) DS530-40 (40M) or DS530-50 (50M)
Note: Total distance between DS-511 Processor and Transducer must not exceed 400 Meters.
DS530-20 Transducer with 20M cable connected