

RUGGED.

DOCKING STATIONS AND VEHICLE MOUNTS



NEW


MCS Accessories - Power Distribution Block

Placement	Drilling Required	Weight	Height	Width	Depth
Can be positioned in any convenient location	Yes	0.42 lbs	1.5"	3.63"	3.30"

Features

- 6 circuit block without a negative bus
- Clear insulating cover with label recesses that accepts Small Format Labels
- Tin-plated copper busses and fuse clips give 30 amperes rating per circuit
- Accepts ATO and ATC fast acting blade fuses
- Four thru holes for mounting
- Maximum Amperage per Circuit: 30 Amperes
- Maximum Amperage per Block: 100 Amperes
- Maximum Voltage Rating: 32 Volts DC

Item No. 7160-0110

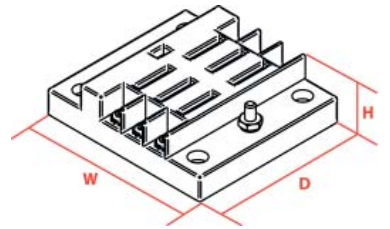

 **GAMBER
JOHNSON**[®]
Very Well Connected[™]

3001 Borham Ave
Stevens Point, WI 54481
Phone: 800-456-6868
Fax: 715-344-8845

Email: gamberj@gamberjohnson.com
Website: www.gamberjohnson.com