

# RUGGED.

DOCKING STATIONS AND VEHICLE MOUNTS




## Mongoose - 9" Locking Slide Arm

Placement	Motion Attachment Included	Tilt	Rotates	Weight	Height	Width	Depth
Any <i>Upper Tube, Complete Pole, Low Profile Brackets, Center Pole</i> or directly to any flat surface	No	<b>Yes</b> - up to 90° fore	Entire arm - 360° can lock at every 15°	5.15 lbs	1.60"	3.95"	10.94"

### Features

- Patent Pending design
- The entire arm can rotate around 360° with locking points at every 15°
- To rotate the arm simply pull the front lever out, rotate to desired position and then release the lever
- Locking slide arm can telescope 9" to 13" from the center of the pole and utilizes the industry first, *Slam and Lock* technology, that allows you to simply push the computer back to the retracted position and it automatically locks into place
- Heavy duty, spring loaded steel, side pin was tested to 50,000+ cycles
- Designed for use with the following Gamber-Johnson Standard Motion Attachments: *CLEVIS 0-90, DS-CLEVIS, CLEVIS 0-90T, LOWSWIVEL and MCS-CLEVIS (sold separately)*
- Can be mounted directly to a flat surface or on any *Upper Tube, Complete Pole, Center Pole* or *Low Profile Bracket*.
- Heavy gauge steel construction for long-term durability
- Black powdercoat finish for maximum corrosion resistance

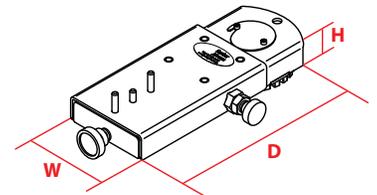

Item No. **7160-0219**



Locking Slide Arm in 9" locked position



Locking Slide Arm fully extended in 13" position



3001 Borham Ave  
Stevens Point, WI 54481  
Phone: 800-456-6868  
Fax: 715-344-8845

Email: [gamberj@gamberjohnson.com](mailto:gamberj@gamberjohnson.com)  
Website: [www.gamberjohnson.com](http://www.gamberjohnson.com)