## DEFINING RUGGE

#### EXCEPTIONAL ENGINEERING | ROCK SOLID | EXTENSIVE TESTING

# LAW bot (F-3)

## MAG<sup>™</sup> DOCKING STATION: FOR PANASONIC TOUGHBOOK 30/31 WITH INTERNAL POWER SUPPLY

Item No.	Antenna Pass-Through	Locking Type	Weight
7160-0318-10	NA	<b>Automatic Lock</b> - automatically locks when the computer is docked. The lock must be unlocked with key to release the handle and undock the computer. Lock is keyed alike	5.8 lbs


#### **Features:**

- Magnesium Alloy body design allows for improved docking station design and mounting system/computer performance.
- Design is protected by US Patent Number D616,890
- Sleek, lightweight, yet very rugged for long-term durability
- Gamber-Johnson's docking station has passed the appropriate tests to qualify for the Toughbook Certified status\*
- 120W LIND internal power supply has passed the appropriate tests to qualify for the Toughbook Certified status\*
- Designed using MIL-STD-810G test procedures and complies with FCC Class A standards
- Design works with Toughbook 30 and 31 computers
- Internal circuit board protects against dirt and dust
- Simple, one-handed, front-facing docking mechanism:
  - Pull front handle to the left to dock
  - Unlock the key button to release and undock computer
- Brass locating pins for precise computer placement
- Floating docking connector for reliable docking connection
- · Interlocking mechanism protects against connector damage & prevents engagement until properly mounted
- · Forward facing ports for low mounting capability, minimal cable strain and minimal swivel resistance
- Side LED indicator light can be used to troubleshoot in the field:
  - Green: All ports are ready to use
  - Orange: USB and LAN ports not functioning or external power is not connected
  - Red: PC is not supported or connection is not made
  - Red (Blinking): Error has occurred in firmware, contact Panasonic Technical Support
  - Not Lit: PC not installed or PC is Off, Standby or Hibernation
- USB 2.0 compliant
- 3 year limited warranty (printed circuit board, docking connector)
- · Limited lifetime warranty on all non-electronic components (sheet metal)
- Optional 4 and 5 year extended warranty available
- Can be used with most Motion Attachments
- Dimensions: 3.85" H x 12.40" W x 13.93" D

**Note:** Panasonic recommends that the CF30/31 computers **should not** be "hot docked" into any docking station.

\*The internal power supply docking station is not a Toughbook Certified product







3001 Borham Ave. | Stevens Point, WI 54481, USA Phone: 715.344-3482 | Toll-free: 800.487-9220 | Fax: 715.344-5209 Email: gamberj@gamberjohnson.com | Website: www.gamberjohnson.com



This document, including images, may not be reproduced partly or fully without the expressed written consent of Gamber-Johnson's Marketing Department. © Copyright 2012 Gamber-Johnson LLC

# EFINING



#### **EXCEPTIONAL ENGINEERING | ROCK SOLID | EXTENSIVE TESTING**

## MAG<sup>™</sup> DOCKING STATION: FOR PANASONIC TOUGHBOOK 30/31 WITH INTERNAL POWER SUPPLY


#### **Port Replicator**

Serial (2)	D-sub 9 pin
Ethernet (2)	
USB Ethernet	RJ45
<ul> <li>True Ethernet*</li> </ul>	RJ45
• USB (5)	4 pin
External video	D-sub 15 pin
<ul> <li>Headphones/speakers</li> </ul>	Stereo phono jack
Microphone	Mono phono jack

#### \* Note: The True Ethernet will not work with a Toughbook 30 computer

#### 120W Internal Lind Power Supply

- Operating Temperature: -20°C to 50°C (-4° F to 122° F)
- Non-operating (storage) Temperature: -40°C to 85°C (-40° F to 185° F) •
- Power Output to Computer from Dock = 120 watts (max)
- Input Voltage: 12V DC min to 32V DC max systems •
- Output Voltage: 15.6V DC-16V No Load, 14.5V-15.5V Full Load •
- Under Voltage Protection: 9.5V min to 10.5V max DC
- Over Voltage Protection: 33V min to 34V max DC
- Output Voltage Protection: 17V min to 18V max DC
- Automatic Temperature Reset •
- **Reverse Polarity Protection** •
- Auto Shutdown Circuit
- **Output Current Limit** •
- Load Dump
- Input Fused

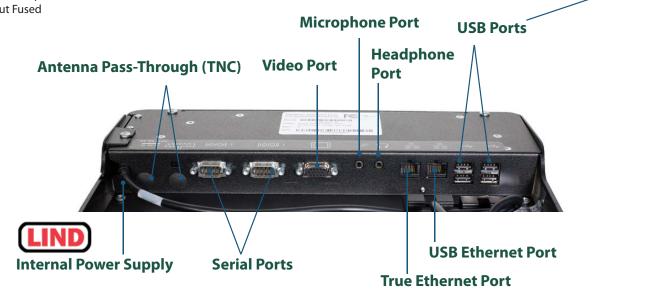



3001 Borham Ave. | Stevens Point, WI 54481, USA Phone: 715.344-3482 | Toll-free: 800.487-9220 | Fax: 715.344-5209 Email: gamberj@gamberjohnson.com | Website: www.gamberjohnson.com



This document, including images, may not be reproduced partly or fully without the expressed written consent of Gamber-Johnson's Marketing Department. © Copyright 2012 Gamber-Johnson LLC