



Very Well Connected™

INSTALLATION INSTRUCTIONS

Product

7160-0507

HP OFFICEJET 150 Printer Mount

Revision

Rev.A

Form


INST-610

Printing Spec: PS-001

The 7160-0507 HP OfficeJet 150 Printer Mount is designed to hold HP OfficeJet 150 Mobile all-in-one printer and is typically used with a Gamber-Johnson DS-74-L mount as described below.

The Printer Mount can also be installed in other arrangements, but the installer may need to supply longer mounting hardware and spacers. The Gamber-Johnson 7160-0351 isolator mount can be used with the printer mount for extra protection against shock and vibration.

A 7/16" Socket & Ratchet or Wrench and a Phillips Screwdriver are needed for installation.

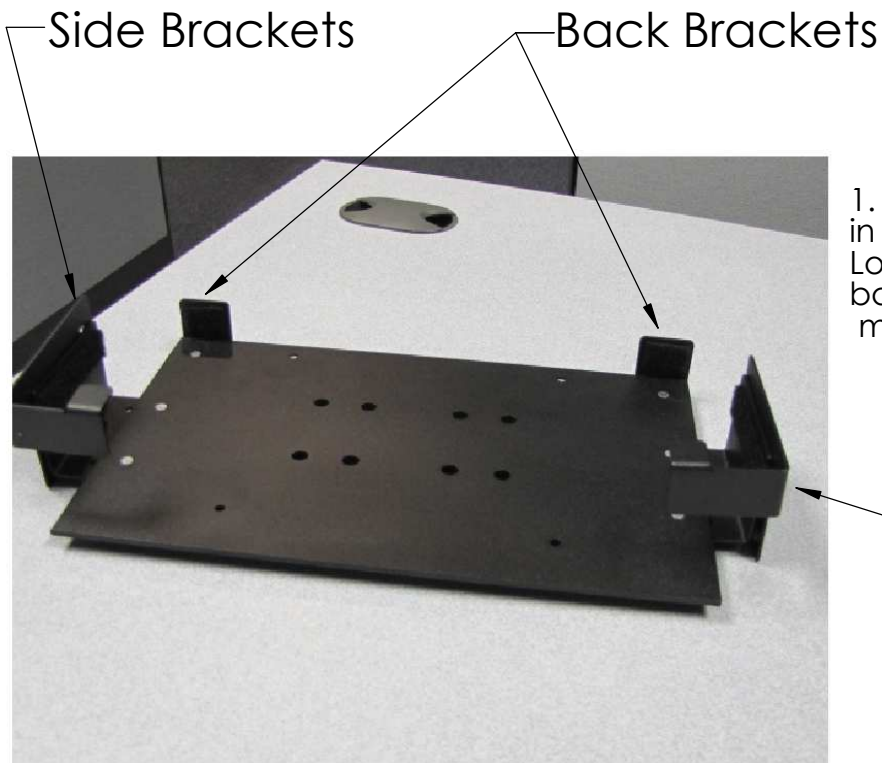

1. The 7160-0507 Printer Mount is shipped in it's most compact form. Loosen nuts securing the side and back brackets to open the printer mount.

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2013 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

2. Typical install is a DS-74-L mount attached to vehicle base or pole.



DS-74-L

Vehicle Base/Pole

3. Attach printer mount to DS-74-L with .25-20 screws, washers & nuts supplied in hardware bag.



.25-20 Flat Head Screws,
Washers and Nylok Nuts



4. Insert printer into printer mount. Center printer so paper feed doors can be opened. Moved side and back buckets against printer body and tighten in place. Attach and secure power and data transfer cables.