

# DEFINING RUGGED

EXCEPTIONAL ENGINEERING | ROCK SOLID | EXTENSIVE TESTING

NEW


## 6" LOCKING SLIDE ARM WITH 3/8" STUD

Placement	Motion Attachment Included	Tilt	Rotates	Slide	Weight	Height	Width	Depth
Any <i>Upper Pole, Complete Pole, Low Profile Brackets, Center Pole</i> or directly to any flat surface	No	No	Entire arm - 360° can lock at every 15°	Yes - up to 5.5" fore/aft	3.63 lbs	2.43"	3.66"	8.74"

### Features:

- The entire arm can rotate around 360° with locking points at every 15°
- To rotate the arm simply pull the front lever out, rotate to desired position and then release the lever
- Locking slide arm can slide up to 5.5" from the center of the pole
- Designed for use with the Gamber-Johnson Standard Motion Attachments with a 3/8" hole (**sold separately**)
- Can be mounted directly to a flat surface or on any *Upper Pole, Complete Pole, Center Pole, Low Profile Bracket* or *Smiley Face Pattern*
- Heavy gauge steel construction for long-term durability
- Black powdercoat finish for maximum corrosion resistance

Item No. **7160-0514**

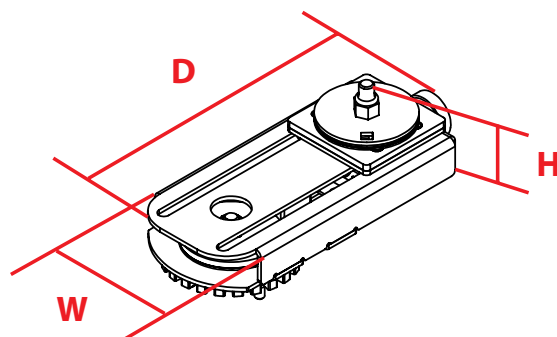

3001 Borham Ave. | Stevens Point, WI 54481, USA  
Phone: 715.344-3482 | Toll-free: 800.487-9220 | Fax: 715.344-5209  
Email: [gamberj@gamberjohnson.com](mailto:gamberj@gamberjohnson.com) | Website: [www.gamberjohnson.com](http://www.gamberjohnson.com)

Follow us on:

This document, including images, may not be reproduced partly or fully without the expressed written consent of Gamber-Johnson's Marketing Department.  
© Copyright 2013 Gamber-Johnson LLC