






## MAG™ Docking Station - for Panasonic Toughbook 30/31

Item No.	Antenna Pass-Through	Locking Type	Weight
7160-0318-01	Single RF (TNC)	<b>Standard</b> - Push, button key lock, to release docking connector. Locks are keyed alike.	4.8 lbs

## **Features**

- Magnesium Alloy body design allows for improved docking station design and mounting system/computer performance.
- Design is protected by US Patent Number D616,890
- Sleek, lightweight, yet very rugged for long-term durability
- Gamber-Johnson has worked with Panasonic to perform the appropriate tests needed to qualify a product as Toughbook Certified.
- Designed using MIL-STD-810G test procedures and complies with FCC Class A standards
- Design works with Toughbook 30 and 31 computers
- Internal circuit board protects against dirt and dust
- Simple, one-handed, front-facing docking mechanism:
  - Pull front handle to the left to dock
  - Push key lock button to release and undock computer
- Brass locating pins for precise computer placement
- Floating docking connector for reliable docking connection
- Interlocking mechanism protects against connector damage & prevents engagement until properly mounted
- Forward facing ports for low mounting capability, minimal cable strain and minimal swivel resistance
- Side LED indicator light can be used to troubleshoot in the field
  - Green: All ports are ready to use
  - Orange: USB and LAN ports not functioning or external power is not connected
  - Red: PC is not supported or connection is not made
  - Red (Blinking): Error has occurred in firmware, contact Panasonic Technical Support
  - Not Lit: PC not installed or PC is Off, Standby or Hibernation
- USB 2.0 compliant
- Use Lind Auto Adapter (Item No. 14103)
- 3 year limited warranty (printed circuit board, docking connector)
- Limited lifetime warranty on all non-electronic components (sheet metal)
- Optional 4 and 5 year extended warranty available
- Can be used with most Motion Attachments
- Dimensions: 3.85" H x 12.40" W x 13.93" D

**Note:** Panasonic recommends that the CF30/31 computers **should not** be "hot docked" into any docking station.







3001 Borham Ave Stevens Point, WI 54481 Phone: 800-456-6868 Fax: 715-344-8845

Email: gamberj@gamberjohnson.com Website: www.gamberjohnson.com







## MAG™ Docking Station - for Panasonic Toughbook 30/31

## **Port Replicator**

- Serial (2)- Single Antenna Pass-ThroughD-sub 9 pinTNC


- Ethernet (2)

- USB Ethernet RJ45
- True Ethernet\* RJ45
- USB (5) 4 pin
- External video D-sul

External video D-sub 15 pin
 Headphones/speakers Stereo phono jack
 Microphone Mono phono jack

\* Note: The True Ethernet will not work with a Toughbook 30 computer



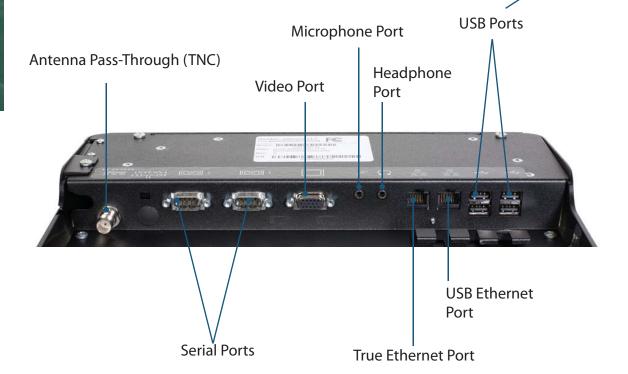





3001 Borham Ave Stevens Point, WI 54481 Phone: 800-456-6868

Fax: 715-344-8845 Email: gamberj@gamberjohnson.com Website: www.gamberjohnson.com